


Discharge Devices

Single-pole Earthing and Discharge Devices

- For discharging static charges
- Different contact electrodes
- Coupling electrode, especially for round conductors (Ø12 ... 26.5 mm) of electrostatic precipitator systems
- Waterproof, plastic-sheathed cable entries, with additional anti-kink protection




General Information:	
Use	Not suitable for use in wet weather conditions
Material (contact electrode)	Cu alloy/gal Sn
Material (contact and coupling electrode)	Zamak
Material (coupling electrode)	Bronze/gal Sn
Material (insulating tube)	Glass-fibre reinforced polyester tube
Material (earthing cable)	Cu, highly flexible

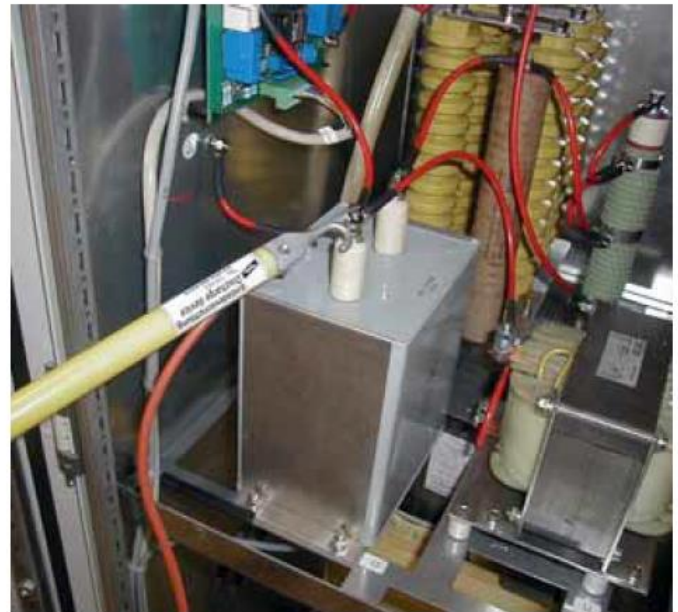

Single-pole device for discharging static charges


Discharge Device with Handle and Earth Clamp with Wing Bolt

Type EV ...	TES 465 EK
Part No.	758 020
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	550 mm
Clamping range	Up to 20 mm

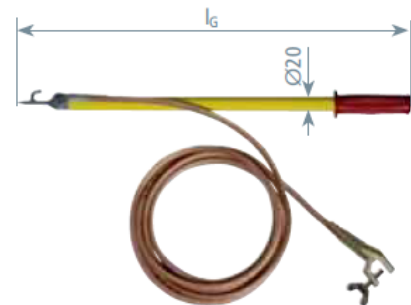


Discharge Device with Handle and Spring-loaded Earth Pliers

Type EV ...	TES 465 EZ
Part No.	758 021
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	550 mm
Clamping range	Up to 18 mm

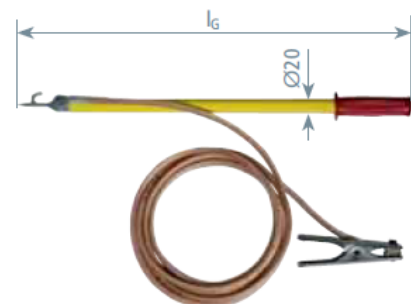


Discharge Device with Handle and Cable Lug at the Earth Cable End Hole (Ø8.4 mm) and silicone cable

Type EV ...	TES 465 KS10
Part No.	758 022
Cable length	3500 mm
Cable cross-section	10 mm ²
Cable sheath	Red silicone cable
Total length (l _G)	550 mm

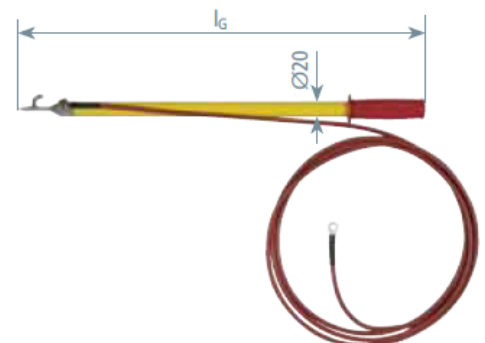


Discharge Devices

Discharge Device with Earth Clamp with Wing Bolt

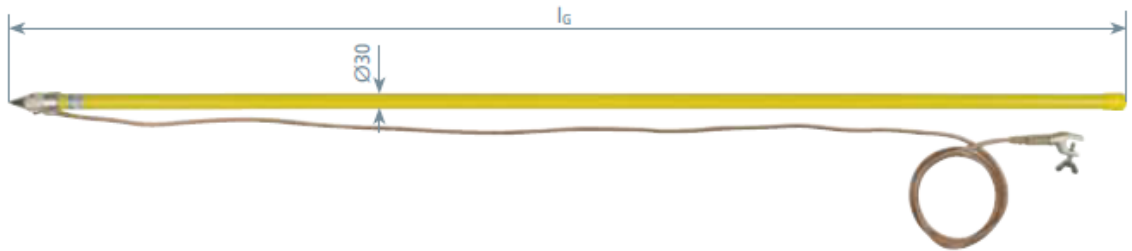

Type EV ...	TS 2000 EK
Part No.	758 001
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	2050 mm
Clamping range	Up to 20 mm


Discharge Device with Spring-loaded Earth Pliers

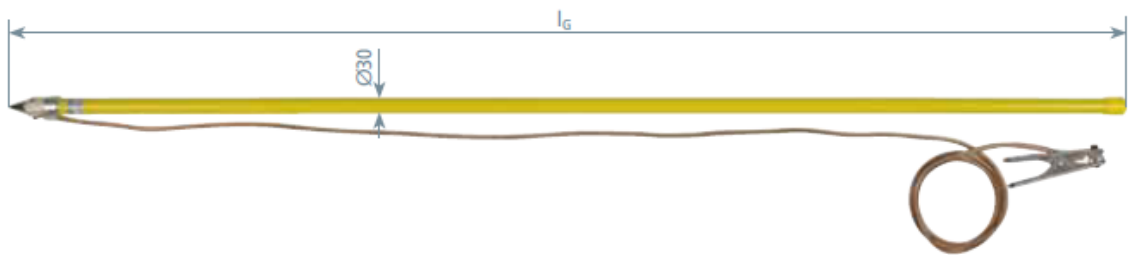

Type EV ...	TS 2000 EZ
Part No.	758 003
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _G)	2050 mm
Clamping range	Up to 18 mm

Earthing Device with Earth Clamp with Tommy Bar

For round conductors (Ø12 ... 26.5 mm) of electrostatic precipitator systems

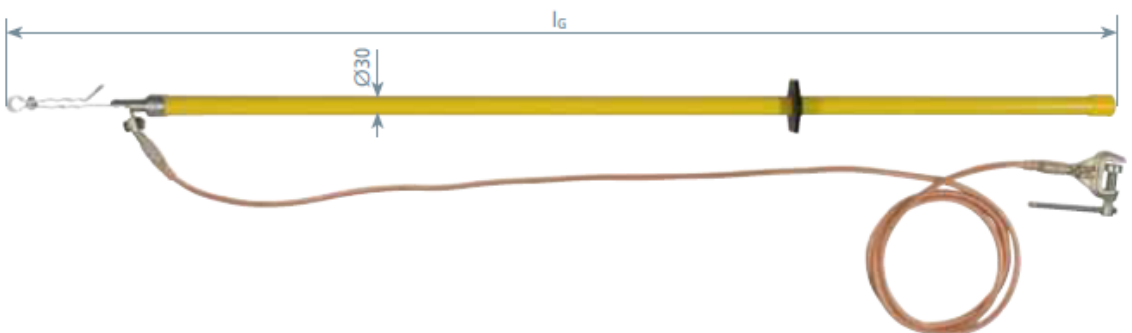


Type EV ...	EH 1725 EK
Part No.	758 015
Cable length	3500 mm
Cable cross-section	25 mm ²
Cable sheath	Transparent
Total length (l _G)	1725 mm
Clamping range	Up to 30 mm

Discharge Devices

Discharge Device with Contact and Coupling Electrode and Cable Lug at the Earth Cable End


PK1 anti-rotation crimped cable lug (hole $\varnothing 12.5$ mm).

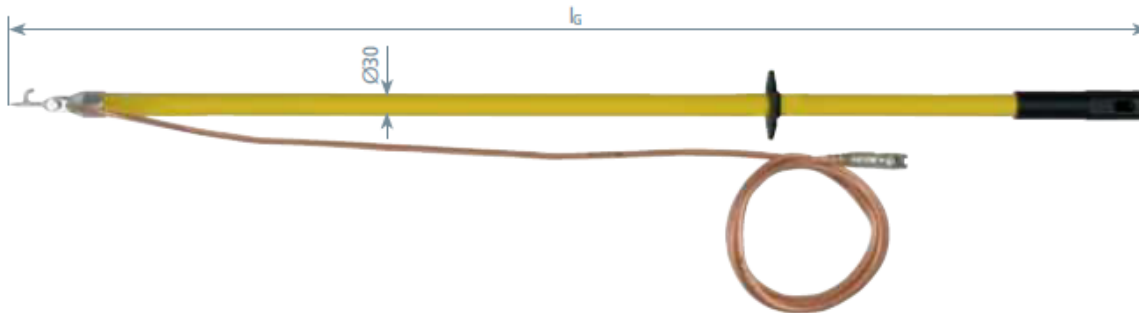

Type EV ...	TES STK 1500 KS
Part No.	758 025
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _g)	1500 mm

Discharge Device with Contact Electrode and Cable Lug at the Earth Cable End


PK1 anti-rotation crimped cable lug (hole $\varnothing 12.5$ mm).

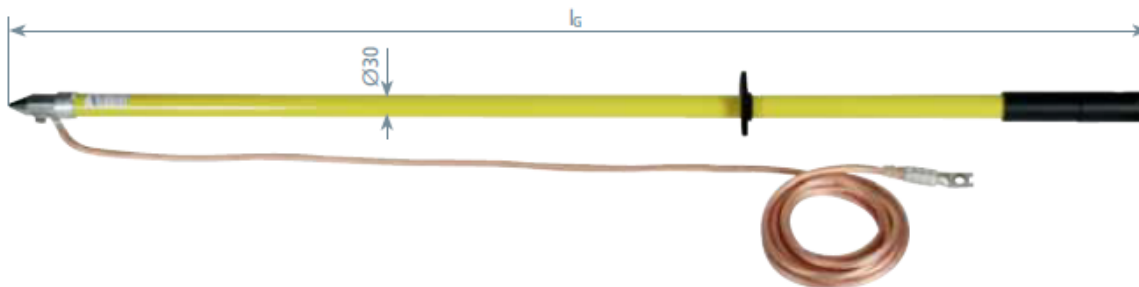

Type EV ...	TS 1470 SN7685
Part No.	758 031
Cable length	5000 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _g)	1500 mm

Discharge Device with Clamp and Cable Lug at the Earth Cable End

PK1 anti-rotation crimped cable lug (hole $\varnothing 12.5$ mm).

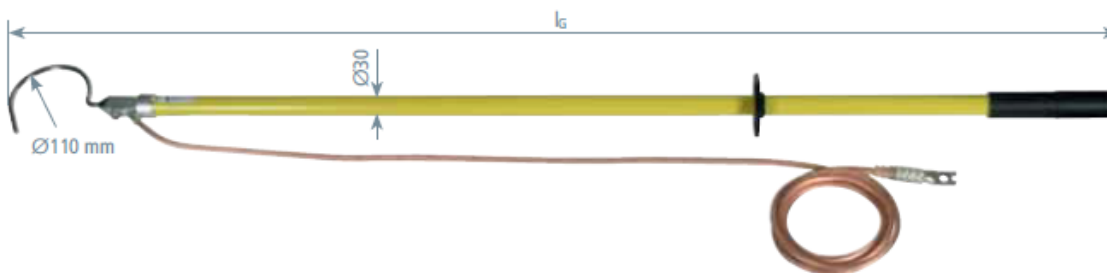

Type EV ...	EHB 1600 SN7114
Part No.	758 028
Cable length	3500 mm
Cable cross-section	16 mm ²
Cable sheath	Transparent
Total length (l _g)	1600 mm